


浊度传感器



浊度传感器

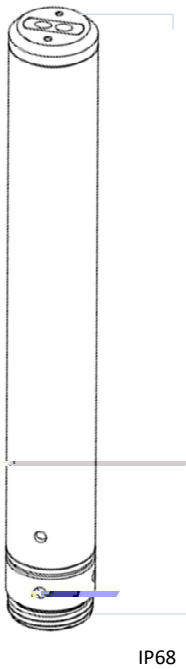

此型浊度传感器 基于90° 散射光原理 采用红外LED光源 光纤

ISO7027

2

:
90

50mL

RS485

Modbus

IP68

	90	ISO7027
	0.3~100NTU, 0.3~1000NTU, 1.0~4000NTU	
	0.01NTU, 0.1NTU, 1.0NTU	
	+/-3% FS	
	0~45°C	
	-10~50°C	
	0.3NTU	
	1	
	IP68, <10	
	5~12V 10mA ()	
	RS485 Modbus RTU	
	(POM	
	170.5	22mm
	< 3 m/s	
	30	T90
*	2	
*	6	

*

80 A
 | +86-512-88960831
 : +86-512-62988329
 : sales@broadensor.com
 : www.broadensor.com

:
 PN: 610210 0.3~1000NTU
 PN: 610210-1 0.3~100NTU
 PN: 610210-2 1.0~4000NTU
 PN: 810003 PUR cable